

Patch panel HD for FO cassettes, empty



DESCRIPTION:

- Modular configuration system:
 - Possibility for FO assembling,
 - Rear basis for cable assembling
- Capacity: 4 slots for FO insertion
- Max ports density:
 - 96 ports FO with LCdx
 - 48 ports FO with SCsx
- Prepared for different type of cassettes:
 - spliced (HD SPL)
 - MPO type
 - breakout (HD BOT)

TECHNICAL SPECIFICATION

Material:

Frame – powder paint coated steel
Guidance – Plastic

Color:

Black RAL 9005

Temperature range

-40°C do +70°C

Ingress protection:

IP 20 according to PN-EN 60529.

Weight:



0.75 kg

Scope of supply:

Frame, empty

Important notice

Buyer and/or user of this product has to make sure before using this product that it is suitable for the intended use. All questions of liability relating to this product are subject – in accordance with the prevailing – to the Term of Sale of the selling Fibrain subsidiary.

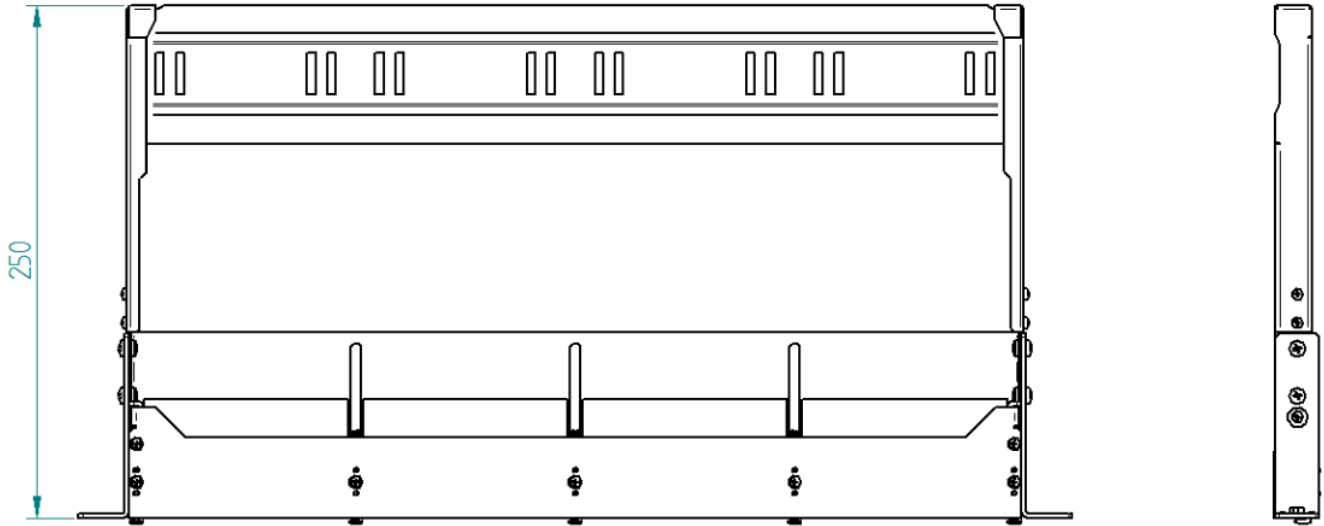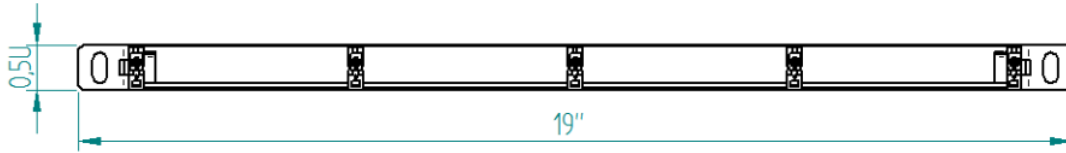

Dimensions			Reference number
Height [U = 44,45mm]	Width [inch]	Depth [mm]	
0.5 U	19	250	XBU00

Important notice

Buyer and/or user of this product has to make sure before using this product that it is suitable for the intended use. All questions of liability relating to this product are subject – in accordance with the prevailing – to the Term of Sale of the selling Fibrain subsidiary.