

Typ:	Connection module	MSO
		REV: 0
Ref:	XR200	F

Connection module HD RJ45, kat.6A, screened



## FEATURES:

- Cat.5/Cat.6/Cat.6<sub>A</sub> performance according to: ISO 11801, EN 50173, ANSI/TIA 568.2-D
- Screened
- Port density up to 48 ports per 1U
- The highest quality guaranteeing large margins of transmission parameters over the requirements of the standards
- The best performance in conjunction with FibrainDATA connection cables
- Component complies to IEC 60603-7-51
- Efficient signal compensation inside a module
- Toolless termination
- Module construction equipped with an element for attaching the inserted cable without the use of cable ties
- IDC termination technology
- Pins covered with layer of gold
- Module construction guaranty a minimal untwist of wire pairs
- Die cast housing guaranties 360° EMC protection
- Automatic dust cover made of different colors for color coding
- Identification according to 568A and 568B

## **TECHNICAL PARAMETERS**

Standarisation	ISO 11801-x, EN 50173-x, TIA 568.2-D, IEC 60603-7-41
Operation temperature range	-10 °C ÷ 60 °C
Storage temperaturę range	-40 °C ÷ 70 °C
Transmission performance	kat.6 <sub>A</sub>
Shileding	Yes
Housing material	Zinc alloy die cast
Max. Current rating [A]	1,5
Min. isolation resistance [MΩ]	500
Max DC resistance [Ω]	20
Material of IDC connector	Fosforobrąz (CuSN)
IDC plating	Min 6 µm of gold layer, min 80 µm of nickle layer
Conductor diameter range (wire)	AWG 22 ÷ AWG 26
Conductor diameter range (stranded wires)	AWG 22/7 ÷ AWG 26/7
Cable diameter range	5,0 ÷ 8,5 mm
Min number of connection/disconnection cycles	750
Min number of re-termnations	20
Fixation	Without adapters


Important notice

Buyer and/or user of this product has to make sure before using this product that it is suitable for the intended use. All questions of liability relating to this product are subject – in accordance with the prevailing – to the Term of Sale of the selling Fibrain subsidiary.



Тур:	Connection module	MSO
		REV: 0
Ref:	XR200	F

DIMENSIONS:

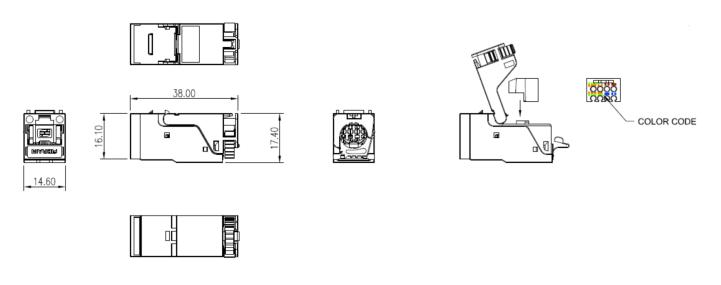

## **ORDERING:**

XR210 FibrainDATA connection module, RJ45/s, kat.6<sub>A</sub>, Aqua dust cover

Important notice Buyer and/or user of this product has to make sure before using this product that it is suitable for the intended use. All questions of liability relating to this product are subject – in accordance with the prevailing – to the Term of Sale of the selling Fibrain subsidiary.