


Type:	DC-DRIM	REV: 1
Issued:	23/06/2014	SK
Modified:	06/10/2014	SK

FTTH Double Jacket LSOH Drop Cable 12-24 Fibers – with Aramid Strength Members DC-DRIM

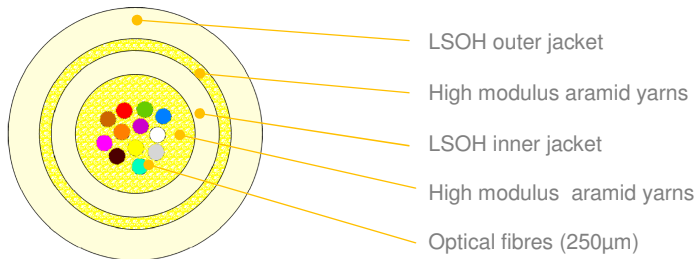

*schematic drawing, not to scale

APPLICATION:

Optical cable with aramid yarns reinforcement
For customer connection, fully dielectric cable
MTP/MPO termination cable
LAN and FTTH networks
Distribution network,
Inside house OLT connection
Data Center connections cable

DESIGN:

Aramid yarns as strain relief
250µm optical fibres (12-24 pcs)
Outer jacket (LSOH)

DESIGN:

No. of fibres		12	24
Outer diameter	[mm]	4,5 ±5%	5,0 ±5%
Max tensile load (ε=0,5%)	[N]	600	600
Weight	[kg/km]	8 ±10%	9 ±10%
Min bending radius	[mm]	65 (depends on fibre type)	75 (depends on fibre type)

TECHNICAL AND ENVIRONMENTAL CABLE CHARACTERISTICS

Max short term tensile load	EN 187101, IEC 60794-1-2-E1, Δα reversible	600 N
Max long term tensile load	EN 187101, IEC 60794-1-2-E1, Δα ≤ 0.1 dB/km	200 N
Crush performance	EN 187101, IEC 60794-1-2-E3, Δα ≤ 0.1 dB, no damage	300 [N/10 cm]
Bending performance	EN 187101, IEC 60794-1-2-E6, R=5mm, 20N, 35 cycles	No damage
Temperature range: Installation	EN 187101, IEC 60794-1-2-F1, Δα ≤ 0.1 dB/km	-5 ... +55 [°C]
Operation		-10 ... +70 [°C]
Transport & Storage		-20 ... +70 [°C]

(*) values for single-mode fibres, all optical measurements performed at 1550nm

OPTICAL FIBRES AND LOOSE TUBES COLOUR IDENTIFICATION

Fibres and tubes identification information see **DSH_Colors_CODE_XXXX** document.

FIBRES PARAMETERS

Optical fibres parameters see **DSH_OFP** document.

MARKING

The following print (using ink jet printer) is applied at 1-meter intervals:

- Supplier: FIBRAIN
- Standard code (Product type, fibre type, fibre count)
- Year of manufacture: xxxx
- Length marking in meters
- Cable ID / Drum No

Example: FIBRAIN DC-DRIM 12F SM G657A1 FTTH DROP CABLE LSOH "YEAR OF MANUFACTURE" "LASER SYMBOL" "LENGTH MARKING" "BATCH NUMBER"

The accuracy of marking is ±0,5%. Remarking is in accordance with Bellcore GR 20 and supersedes earlier markings. Occasional loss of marking is possible. Cables can be supplied with a range of single mode or multimode fibres and customized print.

OUTER JACKET COLOURS:

Sheath colour	Ivory	Yellow	White	Blue	Orange	Green	Aqua	Violet
RAL	1015	1021	9010	5015	2003	6018	6027	4003

*other colours available

Type:	DC-DRIM	REV: 1
Issued:	23/06/2014	SK
Modified:	06/10/2014	SK

PACKING

Cables will be shipped on disposable wooden, plywood or treated wooden drums. Both ends of the cable will be capped and accessible for testing. Rotation direction arrow will be marked on the drum together with identification information.

DELIVERY LENGTH

2000 – 8000 meters \pm 5%, with possibility of supplying up to 5% of total contract quantity as short length cables which should be above 1000 meters long. Tolerance of 5 % of order quantity shall be allowed.

The information is believed to be correct at the time of issue. Fibrain reserves the right to change this specification without prior notice. This specification is not contractually valid unless specifically authorised by Fibrain. Buyer and/or user of this product has to make sure before using this product that it is suitable for the intended use. All questions of liability relating to this product are subject – in accordance with the prevailing – to the Terms of Sale of the selling Fibrain subsidiary.