


Type:	Closure FO DROP HUB 5 ports round	REV.: 1.1
Ref. code:	FDHB-A0	
Date:	08.03.2013	WM
Modification:	21.02.2019	PG

Distribution fiber

Closure FO DROP HUB 5 ports round - **FDHB-A0**

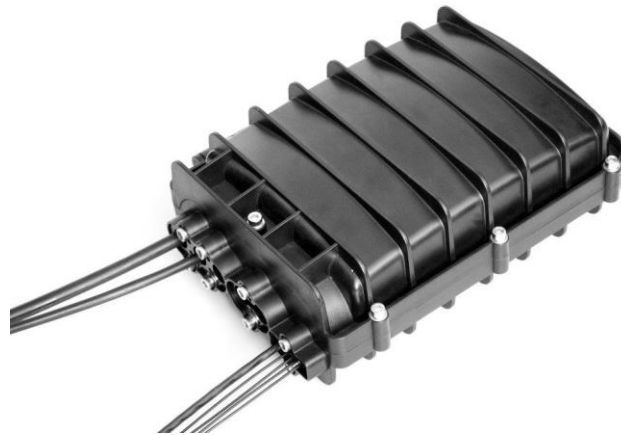

DESCRIPTION:

FDHB-A0 closure is an innovative solution which is intended to construct FTTx networks. It is equipped with 3 ports for single cables (Ø 8-15 mm), one port for uncut cable (Ø 8-15 mm), one port for Ø 6mm cable, and four Ø 2.0mm drop cables. Due to additional handles, the closure can be mounted inside a well or on a pole.

APPLICATIONS:

Nodal points of fiber optic networks;
Distribution points of fiber optic networks;
FTTx networks;

FEATURES & BENEFITS:

Max. capacity up to 60 welds;
Leakproofness of mechanic ports;
Possibility of placing fiber optic and Drop cables;
Possibility of placing uncut cables;
Aerial or inside wall mounting;
A ground bolt;

TECHNICAL SPECIFICATION

Technical data	FDHB-A0
Max. number of fibers	60
Max. number of welds	60
Max. number of cassettes	5
Range of cable diameter [mm]	8 - 15
Max. number of cable entrances	5
Dimensions (w)x(h)x(t) [mm]	220x300x100
Port leakproofness	mechanical
Type of entrance cables	Duct cables, Aerial cables, DropCables,
Working temperature	-40°C - +55°C
IP protection	IP68
Type of housing material	MPP

ADDITIONAL EQUIPMENT:

Cassettes:	FDHB-A0-TRAY
------------	--------------

Type:	Closure FO DROP HUB 5 ports round	REV.: 1.1
Ref. code:	FDHB-A0	
Date:	08.03.2013	WM
Modification:	21.02.2019	PG

Distribution fiber



Inside view



A closure with mounted handle

ORDERING INFORMATION:

FDHB-A0

DROP HUB fiber optic closure, 5 round ports, equipped with two cassettes and a mounting handle inside a well, ground bolt.

Important notice

Buyer and/or user of this product has to make sure before using this product that it is suitable for the intended use. All questions of liability relating to this product are subject – in accordance with the prevailing – to the Term of Sale of the selling Fibrain subsidiary.