

Typ:	VFTO-E1, not equipped	18.11.2014
		REV: 0
		AtL
Ref:	VFTO-E1, see the Ordering Information section	

## Easy Access Cable FTTx solution.

FTTH VFTO-E1 customer outlet- 4 fibers / 2 x adapter



### OVERVIEW:

VFTO-E1 customer outlet is specifically designed for FTTH networks as a termination point of an optical duct for max. 4 optical fibers in various home and business networks. The outlet facilitates placing and connecting cables with 2 x SC or 4 x LC pigtails with the use of splices in a cassette. Connectors can be of PC and APC standard with inner and outer shutters. **In case of mounting adapters, flangeless adapters should be used.**

### APPLICATIONS:

Distribution network  
FTTH networks with EAC cables  
Last mile connections  
Termination of FTTH networks

### FEATURES & BENEFITS:


Compact and innovative design  
Indoor applications  
Wide range of fiber optic adapters  
Description field for adapters on a top part of an outlet with a transparent flip cover  
Available in a customer option (\*lower labour costs)  
Possibility to personalize the outlet (logo)  
Possibility to mount on a DIN rail  
Adapter facilitates the mounting on a wall

### TECHNICAL SPECIFICATION:


Material:	ABS UL94-V0
Dimensions (w)x(h)x(d) [mm]:	85x85x28
Temperature:	-20C - +50C
Protection level:	indoor applications IP40/IK05
Mounting:	indoor, wall, rail (DIN standard)
Cassette capacity:	4 fusion, 2 mechanical or 4 ANT splices
Fiber type:	15mm bending radius, compatible with A1, A2, A3, B2, B3 standards
Length of extra fiber:	900um - 100cm fiber in an outlet 250um - 200cm fiber in an outlet
Entry ports:	1 entry port in each part of the outlet (1 port on a side) entries from outer part of an outlet (mounting on a flush mount box) all entry ports are defined by removing a blind adapter max. diameter of cables: 4mm

Typ:	VFTO-E1, not equipped	18.11.2014
		REV: 0
		AtL
Ref:	VFTO-E1, see the Ordering Information section	

## Easy Access Cable FTTx solution.

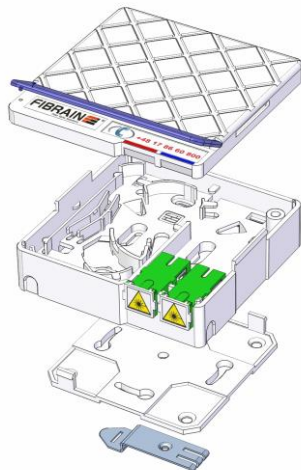

Outlet design

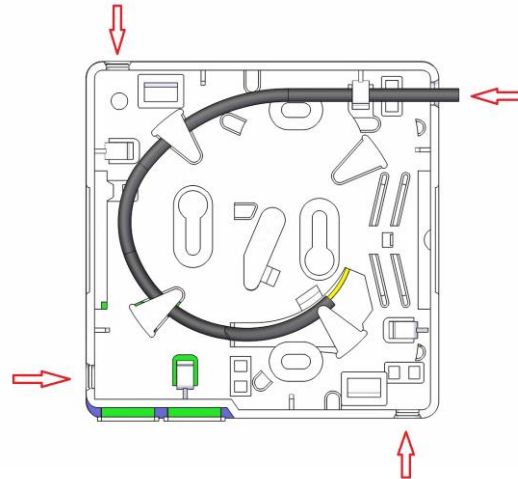

Entry ports



Packaging

### ADDITIONAL POSSIBILITIES - LOGO:

VFTO-E1 customer outlet is available in 3 options. A standard option includes a customer outlet without a logo. Second option is a VFTO-E1 outlet with a Fibrain logo. Therefore, there is a possibility to personalize an outlet by printing an operator's logo. Further details concerning minimum number of outlets with operator's logo, printing and number of colours need to be determined individually with our Sales Department.

### ORDERING INFORMATION:

VFTO-E1-BL-0                      Fibrain customer outlet in VFTO-E1 option, no logo, not equipped, no mounting adapter on a DIN rail

- Logo:    BL: no logo  
           FB: FIBRAIN logo  
           XX: Operator's logo (details concerning printing and number of colours need to be determined individually)

Support for VFTO-E1 outlet: 0 - none, 1 - VFTO-E1-SUP-1, 2 - VFTO-E1-DIN-1;

Important notice  
 Buyer and/or user of this product has to make sure before using this product that it is suitable for the intended use. All questions of liability relating to this product are subject – in accordance with the prevailing – to the Terms of Sale of the selling Fibrain subsidiary.